


Kit Includes:
 Wreath Plastic
 50ct Intelligent Pixels x3

Step 1: Install Lights

From the back (picture to the left shows front view) begin pushing the lights through the corrugated plastic following the path as shown. The wreath will use a total of 3 strands, connected end to end.

Step 2A: Configure Controllers & Connect Lights (E1.31)

There is timing for a RGB Wreath in WowLights Pro Layout Christmas sequences. Configure the controller as shown below and connect the lights to output #1.

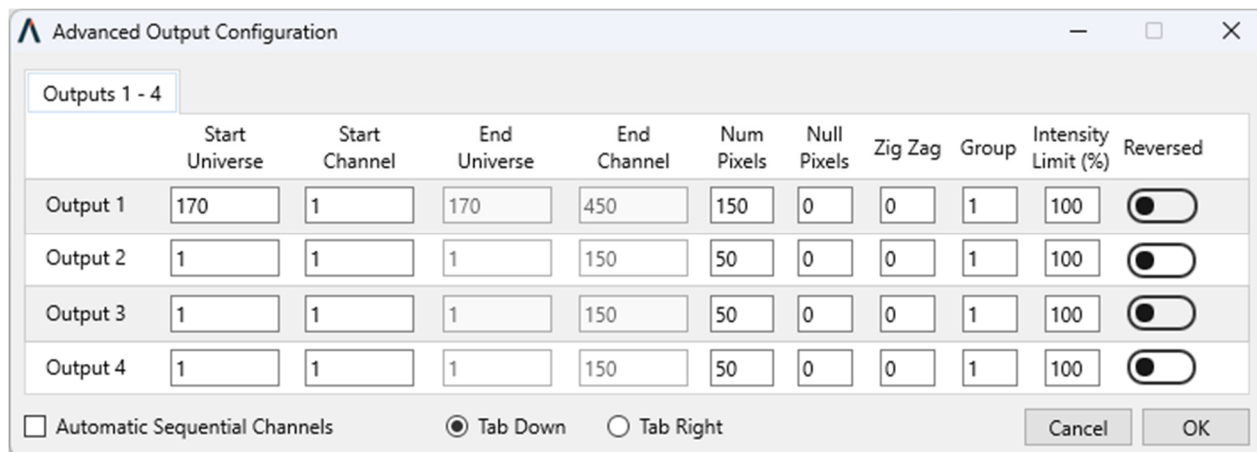

Step 2B: Configure Controllers & Connect Lights (Pixie)

To setup the wreath to run on a Pixie controller, first update the settings in the preview to the following (change DMX to LOR and set the Start Unit ID to 49). Connect the lights to output #1.

LOR Max Circuit 510

Enter channel on first row, auto-number the rest
 Enter a channel on every row
 Separate Unit ID for each RGB string

	Network	Start Unit ID	Start Circuit	End Unit ID	End Circuit
▶ 1	Reg... ▾	49	1	49	150
2	Reg... ▾	49	151	49	300
3	Reg... ▾	49	301	49	450

Then set the ID of the Pixie Controller to 49 using the switches on the board:

Controller #49 – 0100 1001 (Switches 2, 5 & 8 ON, all others OFF)